


**HIGH-TEMPERATURE SELF-LUBRICATED
STRAIGHT JOURNAL BEARING**

- Journal type
- High temperature — low wear
-65°F to +600°F
(-53.9°C to +315°C)
- Material:
CRES A-286
Liner: Fabroid® X

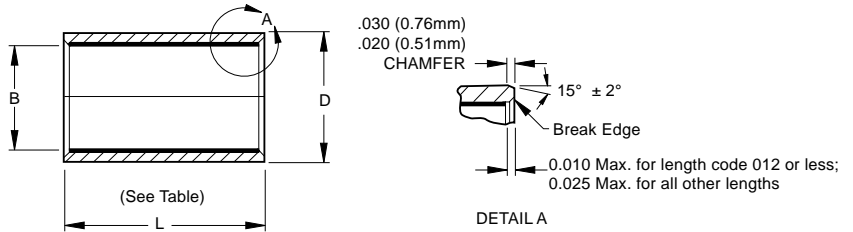

SPECIFICATIONS AND ORDERING INFORMATION

DIMENSIONS – TOLERANCES

Part Number	Nominal Size		B		D		Journal Weight	
	in.	mm	in.	mm	in.	mm	lbs-in	kg-mm
06-450-04-(xxx)†	1/4	6.350	.2515	6.388	.3760	9.550	.009	.004
06-450-05-(xxx)†	5/16	7.938	.3140	7.976	.4386	11.140	.011	.005
06-450-06-(xxx)†	3/8	9.525	.3765	9.563	.5012	12.730	.012	.005
06-450-07-(xxx)†	7/16	11.112	.4390	11.151	.5638	14.321	.013	.006
06-450-08-(xxx)†	1/2	12.700	.5015	12.738	.6265	15.913	.015	.007
06-450-09-(xxx)†	9/16	14.288	.5640	14.326	.6892	17.506	.017	.008
06-450-10-(xxx)†	5/8	15.875	.6265	15.913	.8142	20.681	.027	.012
06-450-11-(xxx)†	11/16	17.462	.6890	17.501	.8767	22.268	.030	.014
06-450-12-(xxx)†	3/4	19.050	.7515	19.088	.9393	23.858	.034	.015
06-450-14-(xxx)†	7/8	22.225	.8765	22.263	1.0645	27.038	.038	.017
06-450-16-(xxx)†	1	25.400	1.0015	25.438	1.1898	30.221	.043	.020
06-450-18-(xxx)†	1 1/8	28.575	1.1265	28.613	1.3148	33.396	.051	.023
06-450-20-(xxx)†	1 1/4	31.750	1.2515	31.788	1.4398	36.571	.058	.026
06-450-22-(xxx)†	1 3/8	34.925	1.3765	34.963	1.5648	39.746	.063	.029
06-450-24-(xxx)†	1 1/2	38.100	1.5015	38.138	1.7523	44.508	.084	.038
06-450-26-(xxx)†	1 5/8	41.275	1.6265	41.313	1.8773	47.683	.090	.041
06-450-28-(xxx)†	1 3/4	44.450	1.7515	44.488	2.0023	50.858	.098	.044
06-450-32-(xxx)†	2	50.800	2.0015	50.838	2.2523	57.208	.111	.050

Add length designation in 1/32 in. increments. (See below.)

†Add length designations in 3 digits.

LENGTH DESIGNATORS

Part Number	Length: +.000, -.010 in./ +.00, -.25mm																												
	1/4	9/32	5/16	11/32	3/8	7/16	1/2	9/16	5/8	11/16	3/4	7/8	1	1 1/8	1 1/4	1 3/8	1 1/2	1 5/8	1 3/4	1 7/8	2	2 1/8	2 1/4	2 3/8	2 1/2	2 3/4	3		
06-450-04-0(xx)	08	09	10	11	12	14																							
06-450-05-0(xx)	08	09	10	11	12	14	16	18																					
06-450-06-0(xx)	08	09	10	11	12	14	16	18	20	22																			
06-450-07-0(xx)	08	09	10	11	12	14	16	18	20	22	24	28																	
06-450-08-0(xx)	08	09	10	11	12	14	16	18	20	22	24	28	32	36															
06-450-09-0(xx)	08	09	10	11	12	14	16	18	20	22	24	28	32	36	40	44													
06-450-10-0(xx)	08	09	10	11	12	14	16	18	20	22	24	28	32	36	40	44	48	52											
06-450-11-0(xx)	08	09	10	11	12	14	16	18	20	22	24	28	32	36	40	44	48	52											
06-450-12-0(xx)	08	09	10	11	12	14	16	18	20	22	24	28	32	38	40	44	48	52											
06-450-14-0(xx)	08	09	10	11	12	14	16	18	20	22	24	28	32	36	40	44	48	52											
06-450-16-0(xx)	08	09	10	11	12	14	16	18	20	22	24	28	32	36	40	44	48	52	56	60									
06-450-18-0(xx)			10	11	12	14	16	18	20	22	24	28	32	36	40	44	48	52	56	60									
06-450-20-0(xx)					12	14	16	18	20	22	24	28	32	36	40	44	48	52	56	60	64	68							
06-450-22-0(xx)					12	14	16	18	20	22	24	28	32	36	40	44	48	52	56	60	64	68							
06-450-24-0(xx)					12	14	16	18	20	22	24	28	32	36	40	44	48	52	56	60	64	68	72	76	80	88			
06-450-26-0(xx)							16	18	20	22	24	28	32	36	40	44	48	52	56	60	64	68	72	76	80	88	96		
06-450-28-0(xx)							16	18	20	22	24	28	32	36	40	44	48	52	56	60	64	68	72	76	80	88	96		
06-450-32-0(xx)							16	18	20	22	24	28	32	36	40	44	48	52	56	60	64	68	72	76	80	88	96		

©2008 RBC Bearings Incorporated. All rights reserved.